

Security Application Module

SE1-5 | SE1-10 | SE1-20 | SE1-30 | SE1-40

Colorado **vNet**[®]
Life Simplified™



Honeywell Security Application Screen on Vibe Color Touchscreen with black bezel

Primary Features

- Control the security system from any configured Color Touchscreen
- One-touch panic buttons
- Supported Security Systems
 - Honeywell Vista 128FBP and 250FBP
 - GE Concord 4 Series
 - DSC Powerseries
- Bi-directional Ethernet/RS232 gateway to third-party Security system
- Communicates over standard CAT5e cable
- Supports baud rates up to 115,200 bps
- Small footprint supports discreet installation



SE1-5 | SE1-10 | SE1-20 | SE1-30 | SE1-40 Security Application Module

Security Application Module

SE1-5 | SE1-10 | SE1-20 | SE1-30 | SE1-40




Life Simplified™

Drawing

Front




Bottom

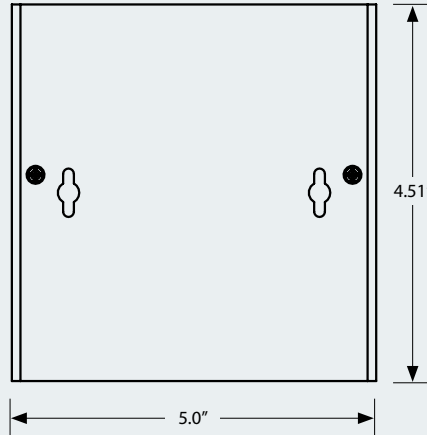

Side



Back

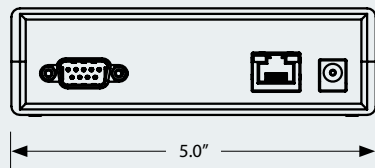

Electrical	Input Voltage and Current	12 VDC, .41A
Physical	HxWxD	1.25"x5.0"x5.25" (3.175cm x12.7cm x13.34cm)
	Weight	0.65 lb (0.82 kg)
Environment	Operating Temperature	0 deg C to 40 deg C (32 deg F to 104 deg F)
General	Indicators	Power and Commissioning LED
	Buttons	Commissioning/Reset
	Standards/Approvals	FCC Part 15: Class B
Connectors	Power	Barrel Connector
	Data	RJ-45 and DB9 (Male)
Number of Touchscreens	Model	
	SE1-5	Up to 5
	SE1-10	Up to 10
	SE1-20	Up to 20
	SE1-30	Up to 30
	SE1-40	Up to 40